

PANEL SIZING:

OVERALL LENGTH: 2700 mm
OVERALL WIDTH: 520 mm
OVERALL THICKNESS: 22mm

BASE MATERIAL:

MADE FROM RECYCLED PET ACOUSTICAL
FELT BACK - 9mm THICKNESS



FLAME SPREAD:

CAN/ULC S102.2-18 STANDARD METHOD OF
TEST FOR SURFACE BURNING

RATING OF 60 (CLASS B) SMOKE RATING 220

SOUND REDUCTION:

CAN/ULC ASTM C423

MOUNT A - 50% NOISE REDUCTION NRC: 0.50


MOUNT C 50 - 100% NOISE REDUCTION: 1.00

MOUNT D 20 - 65% NOISE REDUCTION: 0.65



FSC CERTIFIED PRODUCT



PANEL COVERAGE: 1.40 SQ M / PER PANEL

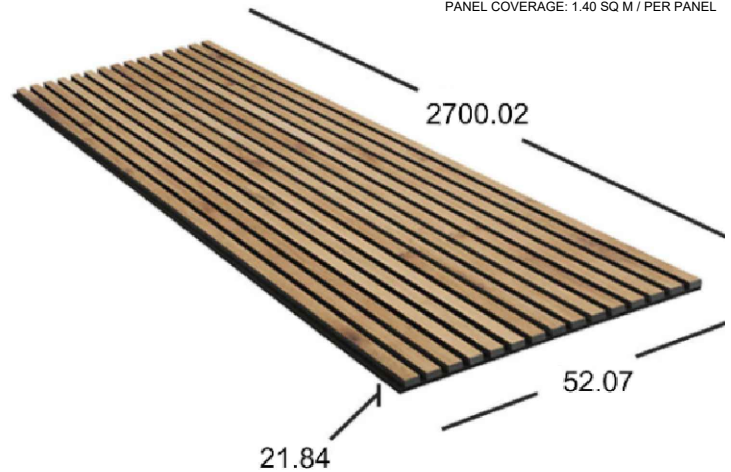


SLATS:

CONSTRUCTED OF MDF SLATS FINISHED
WITH WOOD VENEER

SLATS MEASURE 27mm X 12.7 mm, WITH
DISTANCE OF 12.7 mm BETWEEN.
TOP TO BOTTOM THICKNESS IS 22.3 mm

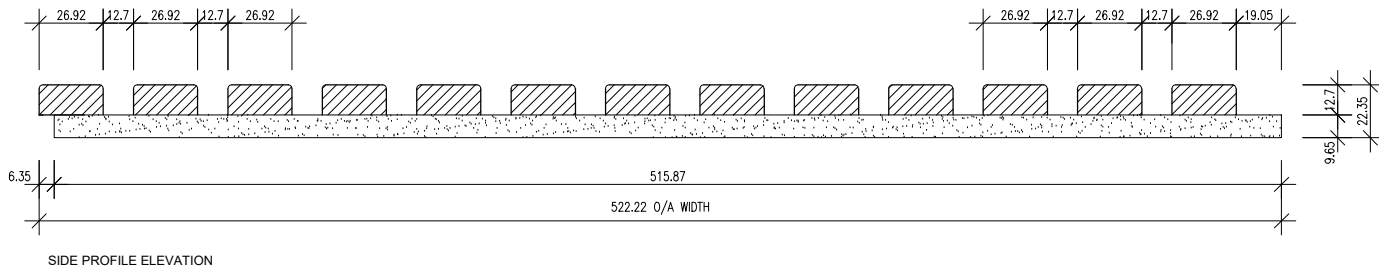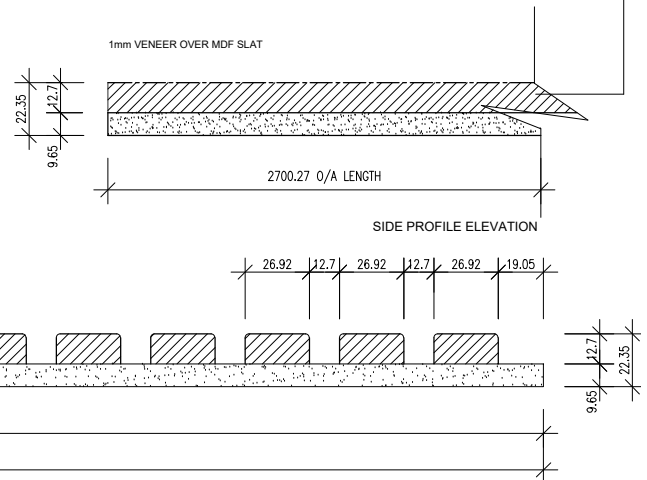

SIDE PROFILE ELEVATION

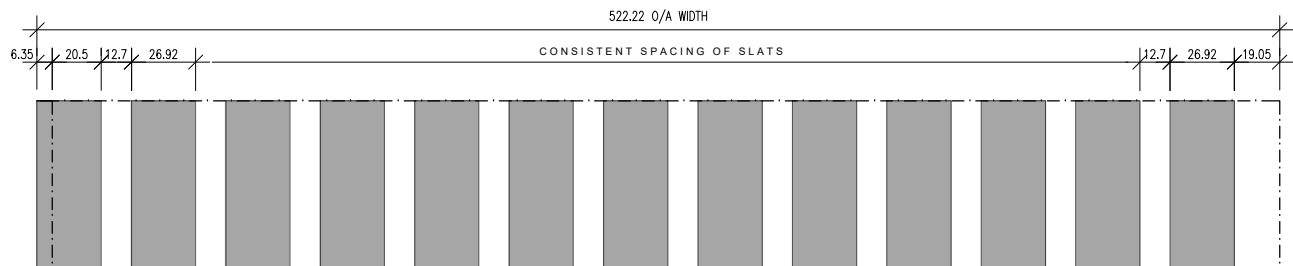


TOP PROFILE PLAN

REFER TO PANELUX WEBSITE FOR INSTALLATION GUIDELINES

GET IN TOUCH


ALL DIMENSIONS SHOWN ARE IN mm
 *REFER TO WEBSITE FOR ALL AVAILABLE FINISHES
 REFER TO PANELUX WEBSITE FOR INSTALLATION GUIDELINES
 DO NOT SCALE

PANELUX FELTED FINISH EDGE



SIDE PROFILE ELEVATION

PANELUX FINISH EDGE



SIDE PROFILE ELEVATION


BASE MATERIAL:

MADE FROM RECYCLED PET
 ACOUSTICAL FELT BACK - 9mm
 THICKNESS


SLATS:

CONSTRUCTED OF MDF SLATS FINISHED
 WITH WOOD VENEER


SLATS MEASURE 27mm X 12.7 mm, WITH
 DISTANCE OF 12.7 mm BETWEEN.
 TOP TO BOTTOM THICKNESS IS 22.3 mm

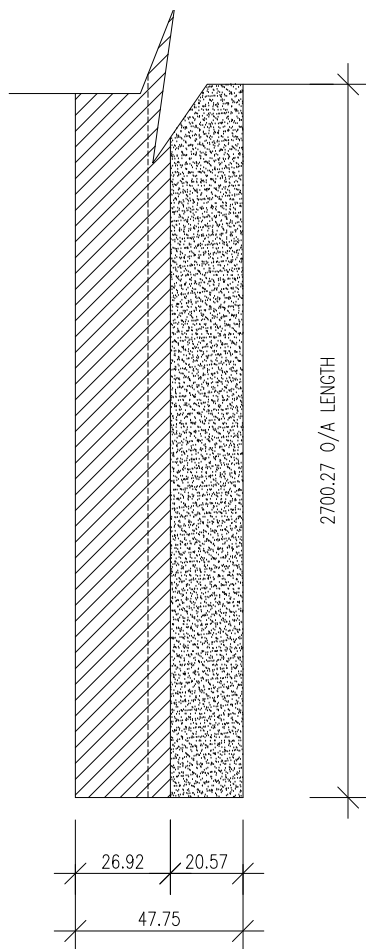


TOP PROFILE PLAN

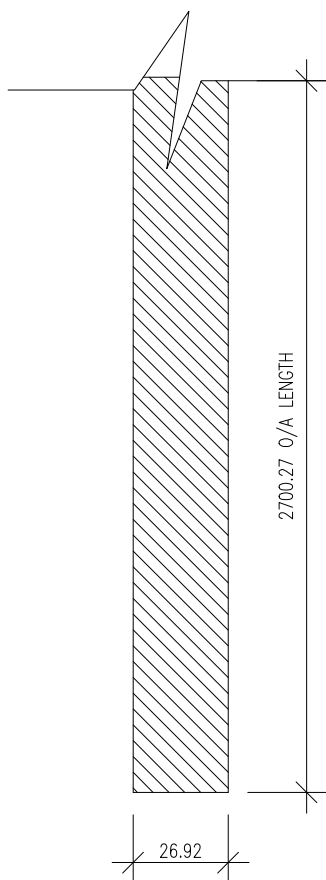

TOP PROFILE PLAN

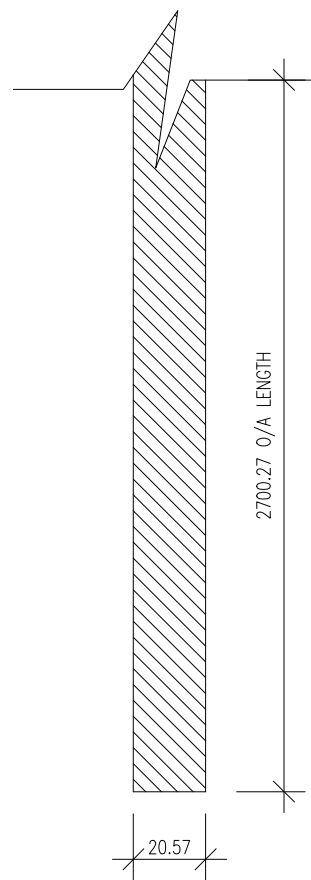

SIDE PROFILE ELEVATION

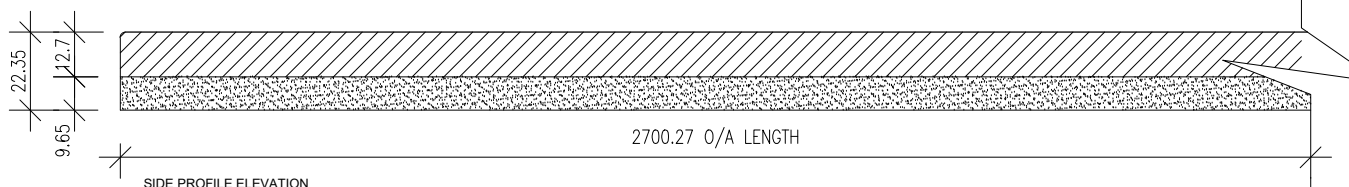

SIDE PROFILE ELEVATION

GET IN TOUCH